



AIR CONDITIONERS

[www.NortonAirConditioners.com](http://www.NortonAirConditioners.com)

## Submittal Data Sheet


Project Name:		Approval:	
Location:		Date:	
Engineer:		Construction:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference:			

Model	
Indoor unit model	DHP14-24-12-U



<b>PERFORMANCE DATA</b>		
Power supply	Ph-V-Hz	208/230V,1Ph,60Hz
<b>Cooling</b>		
Capacity	Btu/h	24000
Input	W	1920
Rated current	A	8.52
EER	Btu/w	12.5
SEER	Btu/w	20.5
<b>Heating at 47</b>		
Capacity	Btu/h	24000
Input	W	1846
Rated current	A	8.19
COP	W/W	3.81
HSPF4		12.5
HSPF5		10.6
<b>Electrical</b>		
MINIMUM CIRCUIT AMPACITY	A	20
MAX. FUSE	A	30
Connection wiring		16*4 AWG
<b>Compressor</b>		
Model		ATF235D22UMT
Type		ROTARY
Brand		GMCC
Capacity	Btu/h	24345
Input	W	1970
Rated current(RLA)	A	14
Locked rotor Amp(LRA)	A	---
Thermal protector		---
Thermal protector position		---
Refrigerant oil/oil charge	ml	POE(VG74)/670
<b>SYSTEM DATA</b>		
Design pressure	PSIG	550/340 PSIG
Refrigerant type	oz	R410A/91.7
Refrigerant precharge	ft	25
Additional charge per ft.	oz	0.32
Liquid side/ Gas side	mm(in)	Φ9.52/Φ15.9(3/8"/5/8")
Max. refrigerant pipe length	ft	164
Max. difference in level	ft.	82
<b>ESP</b>		
ESP range	In. wg.	0-0.64

<b>INDOOR UNIT DATA</b>		
<b>Indoor fan motor</b>		
Model		ZKFN-160-8-1-2
Type		DC
Input		90.0
RLA	A	1.5
LRA	A	---
Winding Resistance	Ω	---
Capacitor	uF	---
Speed(Hi/Mi/Lo)	r/min	880/820/690
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Lo)	CFM	776/694/435
Indoor noise level (Hi/Lo)	dB(A)	44/41/38
<b>Indoor unit</b>		
Dimension(W*D*H)	inch	43x30x10
Packing (W*D*H)	inch	51x32x12
Net/Gross weight	lbs.	87/103
<b>OUTDOOR UNIT DATA</b>		
<b>Outdoor fan motor</b>		
Model		ZKFN-120-8-2
Type		DC
Input		150
RLA	A	0.5
LRA	A	---
Winding Resistance	Ω	---
Capacitor	uF	---
Speed	r/min	810
<b>Air flow &amp; Noise level</b>		
Outdoor air flow	CFM	2354
Outdoor noise level	dB(A)	61
<b>Outdoor unit</b>		
Dimension(W*D*H)	inch	37.24x16.14x31.89
Packing (W*D*H)	inch	42.91x19.69x34.45
Net/Gross weight	lbs.	135.58/148.81
<b>Operation temperature</b>		
Indoor(cooling/ heating)	Deg. F	62~90/32~86
Outdoor(cooling/heating)	Deg. F	-22~122/-22~86
Application area	sq.ft	344-505

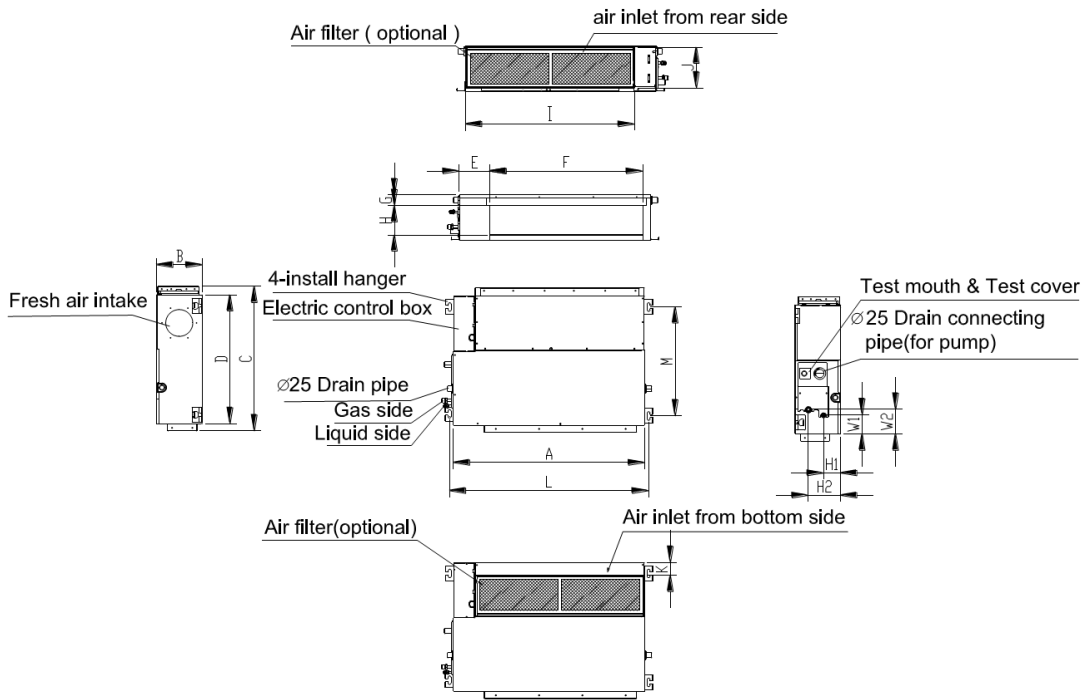

Capacity (Btu)	Outline dimension(mm)				Air outlet opening size				Air return opening size			Size of mounted plug		Size of gas and liquid valve			
	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
24000	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155

**MTIU-24HWFN1-M**

